

ASTER FLOODLIGHT WHITE & RGB+W LED



PRO (ON-BOARD DMX)


PERFORMANCE DATA

TRUE POWER (W)	20	24	24	36 (ALL COLORS)
TRUE LUMENS (3000K)	1990 (.11)	3192 (.27)	2088 (.07)	R=100, G=251,
TRUE LUMENS (4000K)	2119 (.11)	3324 (.27)	2175 (.07)	B=61, W=347 (6500K)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	90.000 (Ta 35°C)

BUILD DATA

CLASS	I	I	I	III
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	24V DC - DMX (RDM)
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF	SEE END OF SECTION
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE	5-POLES FEP+RUBBER
	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION
PROTECTION RATING	IP66 - IK08	IP66 - IK08	IP66 - IK08	IP66 - IK08

DIMENSIONS

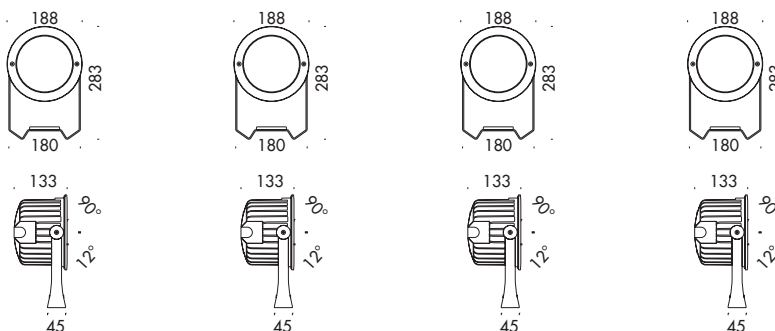

ACCESSORIES



STEEL PEG
A9903



ANCHORING BELT L=200CM
A0003

ANCHORING BELT L=200CM
A0003



ALUMINUM VISOR
(TO BE ORDERED TOGETHER
WITH THE PRODUCT)
A1601

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

CODE COMPOSITION

CODE COMPOSITION	41601	41604	41605	41606
● FINISH	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.5 RGB + W
▲ BEAM	.11 - 12° SPOT .12 - 24° MEDIUM .13 - 38° WIDE	.27 - SYMMETRICAL	.07 - WALL WASHER	.01 - 10° SPOT .36 - 25° MEDIUM .32 - 45° WIDE .70 - 10° x 40° .38 - 40° x 10°