

BRICK APPLIQUE MONO EMISSION



DIRECTIONAL

WALL WASHER AND DIFFUSED





PERFORMANCE DATA

TRUE POWER (W)	7.0	14.0	7.0	14.0
TRUE LUMENS (3000K)	523 (.01)	1046 (.01)	509 (.05)	1018 (.05)
TRUE LUMENS (4000K)	545 (.01)	1090 (.01)	530 (.05)	1050 (.05)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	70.000 (Ta 35°C)	70.000 (Ta 35°C)

BUILD DATA

CLASS	I	I	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT - NONE	SINGLE INPUT - NONE	SINGLE INPUT - NONE	SINGLE INPUT - NONE
PROTECTION RATING	IP65 - IK08	IP65 - IK08	IP65 - IK08	IP65 - IK08
OPENINGS	ROTSYMMETRICAL	ROTSYMMETRICAL	WALL WASHER / DIFFUSED	WALL WASHER / DIFFUSED

DIMENSIONS



CODE COMPOSITION

	30803	30804	30801	30802
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.01 - 10° SPOT .02 - 30° MEDIUM	.01 - 10° SPOT .02 - 30° MEDIUM	.07 - WALL WASHER .05 - DIFFUSED	.07 - WALL WASHER .05 - DIFFUSED

BRICK APPLIQUE MONO EMISSION




PERFORMANCE DATA

TRUE POWER (W)	3.5	7.0
TRUE LUMENS (3000K)	454 (.05)	907 (.05)
TRUE LUMENS (4000K)	486 (.05)	972 (.05)
L90 LIFETIME (HRS)	70.000 (Ta 35°C)	70.000 (Ta 35°C)

BUILD DATA

CLASS	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT - NONE	SINGLE INPUT - NONE
PROTECTION RATING	IP65 - IK08	IP65 - IK08
OPENINGS	DIFFUSED	DIFFUSED

DIMENSIONS



CODE COMPOSITION

● FINISH

.1 - ANTHRACITE	.1 - ANTHRACITE
.2 - PURE WHITE (RAL9010)	.2 - PURE WHITE (RAL9010)
.4 - ALU GREY (RAL9006)	.4 - ALU GREY (RAL9006)
.8 - DARK BROWN	.8 - DARK BROWN


■ LED COLOR

.2 - 2700°K - CRI > 80	.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80	.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80	.4 - 4000°K - CRI > 80

▲ BEAM

.05 - DIFFUSED	.05 - DIFFUSED
----------------	----------------

ACCESSORIES



CUSTOM TAB
(SPECIFY THE CUSTOM
GRAPHIC DESIGN ALONG
WITH ORDERS)



- .1 - ANTHRACITE
- .2 - PURE WHITE (RAL9010)
- .4 - ALU GREY (RAL9006)
- .8 - DARK BROWN

BRICK APPLIQUE DOUBLE EMISSION




PERFORMANCE DATA

TRUE POWER (W)	7.0	14.0
TRUE LUMENS (3000K)	908 (.05)	1814 (.05)
TRUE LUMENS (4000K)	972 (.05)	1944 (.05)
L90 LIFETIME (HRS)	70.000 (Ta 35°C)	70.000 (Ta 35°C)

BUILD DATA

CLASS	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT - NONE	SINGLE INPUT - NONE
PROTECTION RATING	IP65 - IK08	IP65 - IK08
OPENINGS	DIFFUSED	DIFFUSED

DIMENSIONS



CODE COMPOSITION

● FINISH

.1 - ANTHRACITE	.1 - ANTHRACITE
.2 - PURE WHITE (RAL9010)	.2 - PURE WHITE (RAL9010)
.4 - ALU GREY (RAL9006)	.4 - ALU GREY (RAL9006)
.8 - DARK BROWN	.8 - DARK BROWN


■ LED COLOR

.2 - 2700°K - CRI > 80	.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80	.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80	.4 - 4000°K - CRI > 80

▲ BEAM

.05 - DIFFUSED	.05 - DIFFUSED
----------------	----------------

ACCESSORIES



CUSTOM TAB
(SPECIFY THE CUSTOM
GRAPHIC DESIGN ALONG
WITH ORDERS)



.1 - ANTHRACITE
.2 - PURE WHITE (RAL9010)
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

BRICK BOLLARD



250

650

950


PERFORMANCE DATA

TRUE POWER (W)	10.0	10.0	10.0
TRUE LUMENS (3000K)	823 (.64)	823 (.64)	868 (.65)
TRUE LUMENS (4000K)	857 (.64)	857 (.64)	904 (.65)
L90 LIFETIME (HRS)	70.000 (Ta 35°C)	70.000 (Ta 35°C)	70.000 (Ta 35°C)

BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
OVERVOLTAGE PROTECTION	10Kv	10Kv	10Kv
EXTERNAL CABLE	SINGLE INPUT 3-POLES NEOPRENE IP68 FAST CONNECTION	SINGLE INPUT 3-POLES NEOPRENE IP68 FAST CONNECTION	SINGLE INPUT 3-POLES NEOPRENE IP68 FAST CONNECTION
PROTECTION RATING	IP65 - IK08	IP65 - IK08	IP65 - IK08
OPENINGS	MONO EMISSION	MONO EMISSION	MONO EMISSION

DIMENSIONS

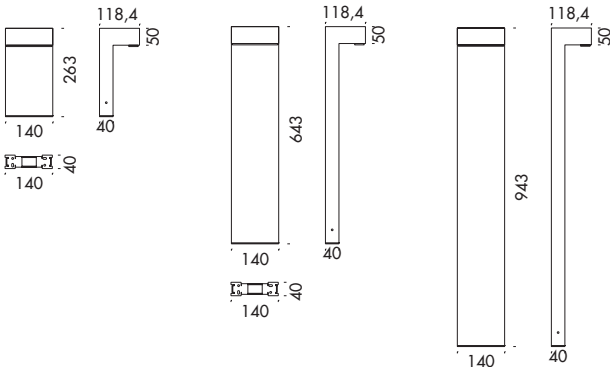

CODE COMPOSITION

	60801	60802	60803
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.64 - MONOEMISSION	.64 - MONOEMISSION	.65 - TRANSVERSE ELLIPTICAL

ACCESSORIES

