

# PIN BOLLARD SINGLE EMISSION


## PERFORMANCE DATA

TRUE POWER (W)	8.0	14.0	14.0
TRUE LUMENS (3000K)	450 (.64)	899 (.64)	899 (.64)
TRUE LUMENS (4000K)	469 (.64)	937 (.64)	937 (.64)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	55.000 (Ta 35°C)

## BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
OVERVOLTAGE PROTECTION	10KV	10KV	10KV
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE
PROTECTION RATING	IP68 FAST CONNECTION IP65 - IK07	IP68 FAST CONNECTION IP65 - IK07	IP68 FAST CONNECTION IP65 - IK07


## DIMENSIONS

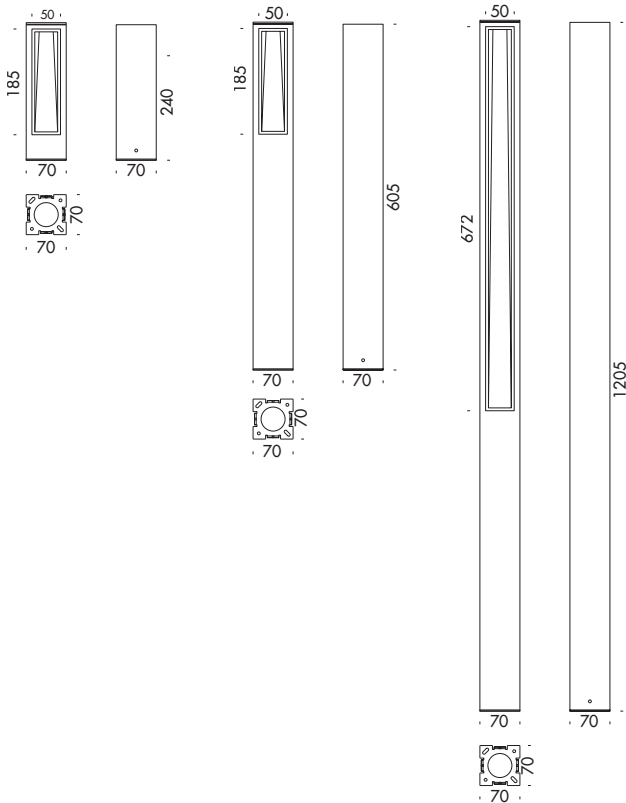

## CODE COMPOSITION

	61001	61025	61037
● FINISH	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.64 - MONO EMISSION	.64 - MONO EMISSION	.64 - MONO EMISSION

## ACCESSORIES



COACH PLATE  
A9939



GROUND MOUNT SPACER  
A0121

# PIN BOLLARD DOUBLE EMISSION




## PERFORMANCE DATA

TRUE POWER (W)	8.0	14.0	14.0
TRUE LUMENS (3000K)	572 (.67)	1142 (.67)	1142 (.67)
TRUE LUMENS (4000K)	595 (.67)	1190 (.67)	1190 (.67)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	55.000 (Ta 35°C)

## BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
OVERVOLTAGE PROTECTION	10KV	10KV	10KV
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE
PROTECTION RATING	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION
	IP65 - IK07	IP65 - IK07	IP65 - IK07

## DIMENSIONS

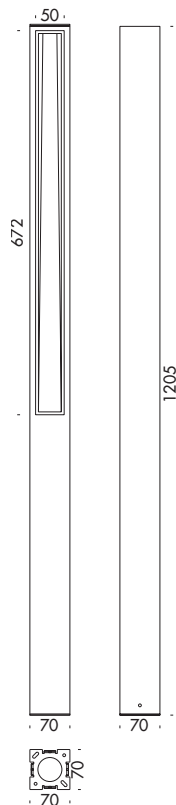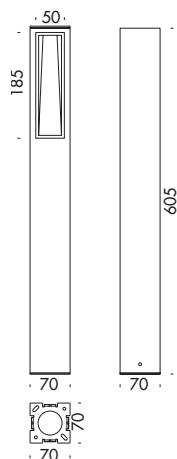

PIN240

PIN600

PIN1200

## CODE COMPOSITION

### ● FINISH

.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)  
.8 - DARK BROWN

### ■ LED COLOR

.2 - 2700°K - CRI > 80  
.3 - 3000°K - CRI > 80  
.4 - 4000°K - CRI > 80

### ▲ BEAM

.67 - DOUBLE EMISSION

.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)  
.8 - DARK BROWN

.2 - 2700°K - CRI > 80  
.3 - 3000°K - CRI > 80  
.4 - 4000°K - CRI > 80


.67 - DOUBLE EMISSION

.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)  
.8 - DARK BROWN

.2 - 2700°K - CRI > 80  
.3 - 3000°K - CRI > 80  
.4 - 4000°K - CRI > 80

.67 - DOUBLE EMISSION

## ACCESSORIES



COACH PLATE  
A9939



GROUND MOUNT SPACER  
A0121

# PIN POLE SINGLE & DOUBLE EMISSION


## PERFORMANCE DATA

TRUE POWER (W)	14.0	14.0
TRUE LUMENS (3000K)	899 (.64)	1142 (.67)
TRUE LUMENS (4000K)	937 (.64)	1190 (.67)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)

## BUILD DATA

CLASS	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF
OVERVOLTAGE PROTECTION	10KV	10KV
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE
PROTECTION RATING	IP68 FAST CONNECTION	IP68 FAST CONNECTION
EMISSION	IP65 - IK07	IP65 - IK07
	SINGLE EMISSION	DOUBLE EMISSION

## DIMENSIONS

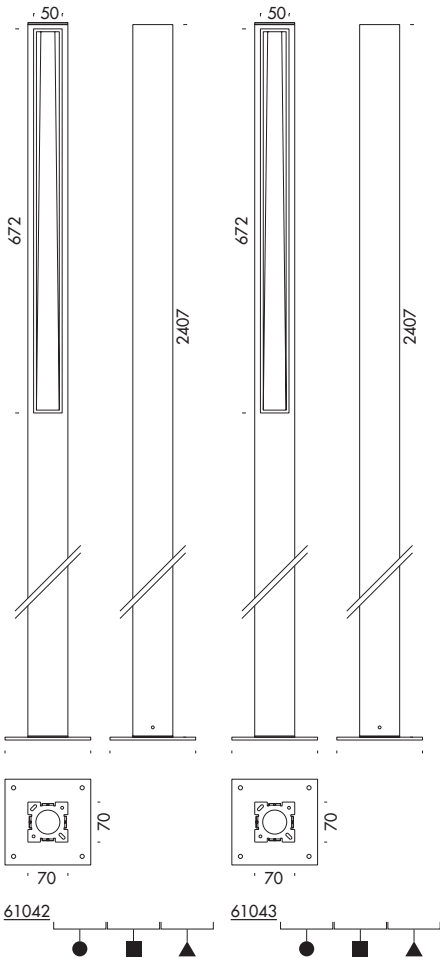

## CODE COMPOSITION

● FINISH

■ LED COLOR

▲ BEAM

.1 - ANTHRACITE	.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)	.4 - ALU GREY (RAL9006)
.8 - DARK BROWN	.8 - DARK BROWN
.2 - 2700°K - CRI > 80	.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80	.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80	.4 - 4000°K - CRI > 80
.64 - MONO EMISSION	.67 - DOUBLE EMISSION

SINGLE EMISSION

DOUBLE EMISSION

## ACCESSORIES

