

SLIM APPLIQUE



MONO EMISSION

MONO EMISSION


PERFORMANCE DATA

TRUE POWER (W)	26.0W	45.3W
TRUE LUMENS (3000K)	2680 (.01)	5640 (.36)
TRUE LUMENS (4000K)	2792 (.01)	5875 (.36)
L90 LIFETIME (HRS)	90.000 (Ta 35°C)	90.000 (Ta 35°C)

BUILD DATA

CLASS	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	24V DC - 4XPWM-CV
POWER SUPPLY	INCLUDED ON-OFF	SEE END OF SECTION
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT
	NOT PRESENT	NOT PRESENT
PROTECTION RATING	IP66 - IK08	IP66 - IK08

DIMENSIONS

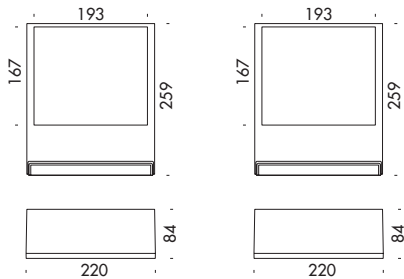

CODE COMPOSITION

	30949	30950
	● ■ ▲	● ■ ▲
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.01 - 10° SPOT	.36 - 25° MEDIUM .03 - 50° WIDE .53 - 50° x 24° ELLIPTICAL .52 - 24° x 50° ELLIPTICAL .07 - WALL WASHER .06 - ASYMMETRICAL

SLIM FLOODLIGHT



PERFORMANCE DATA

TRUE POWER (W)
TRUE LUMENS (3000K)
TRUE LUMENS (4000K)
L90 LIFETIME (HRS)

26.0W
2680 (.01)
2792 (.01)
90.000 (Ta 35°C)

45.3W
5640 (.36)
5875 (.36)
90.000 (Ta 35°C)

BUILD DATA

CLASS
NOMINAL VOLTAGE
POWER SUPPLY
EXTERNAL CABLE

I
220-240V 50/60Hz
INCLUDED ON-OFF
SINGLE INPUT
3-POLES NEOPRENE
IP68 FAST CONNECTION



I
220-240V 50/60Hz
INCLUDED ON-OFF
SINGLE INPUT
3-POLES NEOPRENE
IP68 FAST CONNECTION

PROTECTION RATING

IP66 - IK08

IP66 - IK08


DIMENSIONS



MAX (230V DMX IN)

56.0 (ALL COLORS)
R=167, G=419,
B=101, W=579 (6500K)
60.000 - Ta 35°C

I
220-240V - DMX (RDM)
INCLUDED ON-OFF
1ST INPUT:
3-POLES NEOPRENE
2ND INPUT:
3-POLES NEOPRENE
IP66 - IK08



CODE COMPOSITION

40906



● FINISH

.1 - ANTHRACITE
.2 - PURE WHITE (RAL9010)
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

■ LED COLOR

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

▲ BEAM

.01 - 10° SPOT

40907



.1 - ANTHRACITE
.2 - PURE WHITE (RAL9010)
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

.36 - 25° MEDIUM
.03 - 50° WIDE
.53 - 50° x 24° ELLIPTICAL
.52 - 24° x 50° ELLIPTICAL
.07 - WALL WASHER
.06 - ASYMMETRICAL

40909



.1 - ANTHRACITE
.2 - PURE WHITE (RAL9010)
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

.5 - RGB + W

.01 - 10° SPOT
.36 - 25° MEDIUM
.32 - 45° WIDE
.38 - 40° x 10°
.70 - 10° x 40°

SLIM POLE-MOUNT



SINGLE HEAD

DOUBLE HEAD







PERFORMANCE DATA

TRUE POWER (W)	46.0W	90.0W
TRUE LUMENS (3000K)	5480 (.08)	10.961 (.08)
TRUE LUMENS (4000K)	5709 (.08)	11.418 (.08)
L90 LIFETIME (HRS)	90.000 (Ta 35°C)	90.000 (Ta 35°C)

BUILD DATA

CLASS	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF
OVERVOLTAGE PROTECTION	10Kv	10Kv
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE 5MTS	3-POLES NEOPRENE 5MTS
PROTECTION RATING	IP66 - IK08	IP66 - IK08

DIMENSIONS

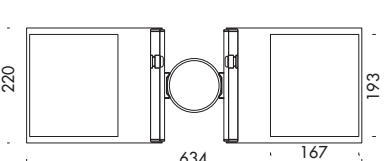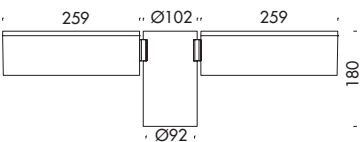

CODE COMPOSITION

70910	70911
● FINISH	● FINISH
■ LED COLOR	■ LED COLOR
▲ BEAM	▲ BEAM
.4 - ALU GREY (RAL9006)	.4 - ALU GREY (RAL9006)
.3 - 3000°K - CRI > 80	.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80	.4 - 4000°K - CRI > 80
.08 - STREET	.08 - STREET
.09 - BICYCLE LANES	.09 - BICYCLE LANES