

# KOS RECESSED WHITE LED






## PERFORMANCE DATA

TRUE POWER (W)	10.0
TRUE LUMENS (3000K)	860 (.01)
TRUE LUMENS (4000K)	910 (.01)
L90 LIFETIME (HRS)	90.000 - Ta 35°C

## BUILD DATA

CLASS	I
NOMINAL VOLTAGE	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT
	3-POLES NEOPRENE
PROTECTION RATING	IP68 FAST CONNECTION
MAX LOAD	IP67 - IK08
	300KG (WALK OVER)

## DIMENSIONS



## CODE COMPOSITION

### ● FINISH

- .1 - ANTHRACITE
- .4 - ALU GREY (RAL9006)
- .6 - AISI 316L S.STEEL

### ■ LED COLOR

- .2 - 2700°K - CRI > 80
- .3 - 3000°K - CRI > 80
- .4 - 4000°K - CRI > 80

### ▲ BEAM

- .01 - 10° SPOT
- .36 - 25° MEDIUM
- .57 - 20°x115° ELLIPTICAL
- .37 - 115°x20° ELLIPTICAL
- .34 - 65° WIDE

## 10505

- .1 - ANTHRACITE
- .4 - ALU GREY (RAL9006)
- .6 - AISI 316L S.STEEL

- .2 - 2700°K - CRI > 80
- .3 - 3000°K - CRI > 80
- .4 - 4000°K - CRI > 80

- .06 - ASYMMETRICAL

## 10506

- .1 - ANTHRACITE
- .4 - ALU GREY (RAL9006)
- .6 - AISI 316L S.STEEL

- .2 - 2700°K - CRI > 80
- .3 - 3000°K - CRI > 80
- .4 - 4000°K - CRI > 80

- .05 - DIFFUSED

# KOS DOWNLIGHT WHITE LED






## PERFORMANCE DATA

TRUE POWER (W)	10.0	10.0	10.0
TRUE LUMENS (3000K)	860 (.01)	860 (.01)	860 (.01)
TRUE LUMENS (4000K)	910 (.01)	910 (.01)	910 (.01)
L80B20 LIFETIME (HRS)	90.000 - Ta 35°C	90.000 - Ta 35°C	90.000 - Ta 35°C

## BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE
	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION
PROTECTION RATING	IP66 - IK08	IP66 - IK08	IP66 - IK08

## DIMENSIONS



## CODE COMPOSITION

	20504	20526	20548
● FINISH	.2 - PURE WHITE (RAL9010) .3 - JET BLACK (RAL9005)	.2 - PURE WHITE (RAL9010) .3 - JET BLACK (RAL9005) .6 - AISI 316L S.STEEL	.2 - PURE WHITE (RAL9010) .3 - JET BLACK (RAL9005)
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.01 - 10° SPOT .36 - 25° MEDIUM .57 - 20° x 115° ELLIPTICAL .37 - 115° x 20° ELLIPTICAL .34 - 65° WIDE	.01 - 10° SPOT .36 - 25° MEDIUM .57 - 20° x 115° ELLIPTICAL .37 - 115° x 20° ELLIPTICAL .34 - 65° WIDE	.01 - 10° SPOT .36 - 25° MEDIUM .57 - 20° x 115° ELLIPTICAL .37 - 115° x 20° ELLIPTICAL .34 - 65° WIDE

# KOS APPLIQUE WHITE LED




## PERFORMANCE DATA

TRUE POWER (W)	10.0	5.0	20.0
TRUE LUMENS (3000K)	860 (.01)	248 (.05)	1710 (.01)
TRUE LUMENS (4000K)	910 (.01)	258 (.05)	1815 (.01)
L90 LIFETIME (HRS)	90.000 - Ta 35°C	90.000 - Ta 35°C	90.000 - Ta 35°C

## BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE
	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION
PROTECTION RATING	IP66 - IK08	IP66 - IK08	IP66 - IK08
EMISSION	SINGLE EMISSION	DOUBLE EMISSION	DOUBLE EMISSION

## DIMENSIONS

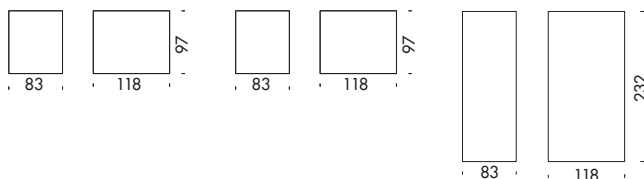

## CODE COMPOSITION

	30528	30530	30529
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006)	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006)	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006)
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.01 - 10° SPOT .36 - 25° MEDIUM .57 - 20° x 115° ELLIPTICAL .37 - 115° x 20° ELLIPTICAL .34 - 65° WIDE .06 - ASYMMETRICAL	.05 - DIFFUSED	.01 - 10° SPOT .36 - 25° MEDIUM .57 - 20° x 115° ELLIPTICAL .37 - 115° x 20° ELLIPTICAL .34 - 65° WIDE .06 - ASYMMETRICAL

# KOS FLOODLIGHT WHITE & RGB+W LED



CORE

PRO  
(ON-BOARD DMX)




## PERFORMANCE DATA

TRUE POWER (W)	10.0
TRUE LUMENS (3000K)	860 (.01)
TRUE LUMENS (4000K)	910 (.01)
L90 LIFETIME (HRS)	90.000 - Ta 35°C

## BUILD DATA

CLASS	I
NOMINAL VOLTAGE	220-240V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT
	3-POLES NEOPRENE
	IP68 FAST CONNECTION
PROTECTION RATING	IP66 - IK08
EMISSION	MULTIBEAM

## DIMENSIONS



## ACCESSORIES




STAINLESS STEEL PEG

A9903



ANCHORING BOLT L=200CM

A0003



ALUMINUM VISOR  
(TO BE ORDERED TOGETHER  
WITH THE PRODUCT)

A0503



.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)

## CODE COMPOSITION



● FINISH  
.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)

■ LED COLOR  
.2 - 2700°K - CRI > 80  
.3 - 3000°K - CRI > 80  
.4 - 4000°K - CRI > 80

▲ BEAM  
.01 - 10° SPOT  
.36 - 25° MEDIUM  
.57 - 20° x 115° ELLIPTICAL  
.37 - 115° x 20° ELLIPTICAL  
.34 - 65° WIDE



● FINISH  
.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)

.5 - RGB+W

.01 - 10° SPOT  
.36 - 25° MEDIUM  
.32 - 45° WIDE  
.38 - 10° x 40°  
.70 - 40° x 10°



● FINISH  
.1 - ANTHRACITE  
.4 - ALU GREY (RAL9006)

.5 - RGB+W

.01 - 10° SPOT  
.36 - 25° MEDIUM  
.32 - 45° WIDE  
.38 - 10° x 40°  
.70 - 40° x 10°