

UOP RECESSED




PERFORMANCE DATA

TRUE POWER (W)	2.0W	2.0W
TRUE LUMENS (3000K)	164(.06)	164(.06)
TRUE LUMENS (4000K)	171 (.06)	171 (.06)
L90 LIFETIME (HRS)	80.000 (TA 35°C)	80.000 (TA 35°C)

BUILD DATA

CLASS	III	III
NOMINAL VOLTAGE	24VDC - DIMMABLE	24VDC - DIMMABLE
POWER SUPPLY	SEE END OF SECTION	SEE END OF SECTION
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT
	2-POLES NEOPRENE	2-POLES NEOPRENE
PROTECTION RATING	IP67 - IK08	IP67 - IK08
MAX LOAD	1500 (WALK OVER)	1500 (WALK OVER)

DIMENSIONS

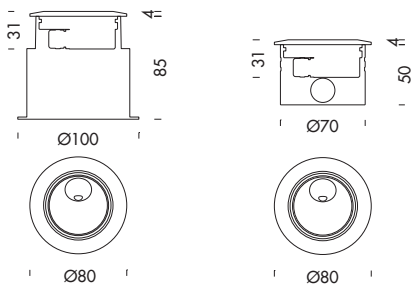

CODE COMPOSITION

	10203	10204
	● ■ ▲	● ■ ▲
● FINISH	.3 - ANODIZED MATTE BLACK .5 - ANODIZED ALUMINUM	.3 - ANODIZED MATTE BLACK .5 - ANODIZED ALUMINUM
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.06 - ASYMMETRICAL	.06 - ASYMMETRICAL